

# **SIEVERT**

## **CRANE & HOIST**

### **DIVISION OF SIEVERT ELECTRIC**



Sievert Crane & Hoist is proud to offer customers all over the world a wide range of manufacturers to deliver the best products at the best prices, making Sievert the one stop shop for all your crane & hoist needs. We are the authorized dealers of lifting equipment, parts and accessories for the following (but not limited to):

#### **HOISTS**

Acco Lifting  
Budgit  
Chester  
Coffing  
Columbus McKinnon  
David Round  
Demag  
Detroit  
Electrolift  
Harrington  
Ingersoll-Rand  
Robbins & Myers (R&M)  
Shaw-Box  
Stahl  
Whiting  
Yale

#### **CRANES**

Sievert Crane & Hoist  
Abell Howe  
Acco  
Contrx  
Gorbel Systems  
Handling System  
Harrington  
Robbins & Myers  
Spanco Systems  
Thern Davit Cranes  
Trambeam

#### **ELECTRICAL & CONTROLS**

Conductix  
Drivecon  
Duct-O-Bar  
Electromotive  
Power Electronics  
Remtron  
Telemotive

For all your lifting needs including New Equipment, Parts, Accessories, Refurbishment, Crane Inspection and Service please contact us at:

#### **NEW EQUIPMENT SALES**

1230 S. Hannah Avenue,  
Forest Park, IL 60130  
sales@sievertelectric.com  
Office: (708) 771-1600  
Mobile: (708) 878-2231  
Fax: (708) 405-5180

#### **PARTS**

1230 S. Hannah Avenue,  
Forest Park, IL 60130  
parts@sievertelectric.com  
Office: (708) 771-1600 ext. 647  
Direct: (708) 435-5008  
Fax: (708) 435-5018

#### **SERVICE, REFURB & INSPECTION**

1230 S. Hannah Avenue,  
Forest Park, IL 60130  
service@sievertelectric.com  
Office: (708) 405-5154  
Mobile: (708) 878-2226  
Fax: (708) 405-5174

**ACCURATE  
LOAD SPOTTING—  
CONTINUOUS  
DUTY**

AIR POWERED HOISTS

MODEL  
**CAH**  
Small Frame



## CAH Small Frame Model Air Hoists

**Coffing CAH Small Frame Models** - Small frame air chain hoists featuring accurate load spotting for specialized lifting applications.

**CAPACITIES & LIFT** - Rated loads of 1/4, 1/2, and 1 ton. 10-foot standard lift, longer lifts available.

**CONTROLS** - Pull Cord provides a lightweight, economical option for accurate control of loads. Pendant Throttle provides one-hand control, for ease of operation. 6-foot control drop length for 10-foot lift (4-foot less than lift—standard).

**CHAIN OPTIONS** - Link-type or roller-type load chain.

**SUSPENSION** - Swivel top and bottom hooks with safety latches standard. Rigid top hook, lug, plain, geared, and air motor trolleys available.

**COMPACT CONSTRUCTION** - Ideal for use in areas with restricted space. Aluminum housing provides strength and portability.

**MOTOR** - 8-vane motor provides high torque, smooth starting, and excellent load control.

**LIMIT STOPS** - Prevent over-travel in upper and lowering directions.

**BRAKE** - Heavy-duty shoe-type with proven design for stopping and holding loads. Externally adjustable.

**SPARK RESISTANT MODELS** - Rated loads of 3/8 and 3/4 ton.

**OPTIONS** - Chain container available. Plated chain optional for corrosion resistance.

**AIR SUPPLY** - Inlet size: 3/8" NPTF; Supply hose: 1/2" I.D. min. Exhaust: 1/2" NPTF; Consumption: 48 SCFM at 90 PSI.

**LIFETIME WARRANTY**

### Trolleys for CAH Models:

For Hook Mounted Hoists - see page 44  
For Lug Mounted Hoists - see pages 34, 35

1/4 - 1 Ton

Made in USA

## ● SPECIFICATIONS ●

### CAH Small Frame Air Chain Hoist

Capacity		Type of Chain	Model Number		Number of Chains	Lift Speeds ** (fpm)		Headroom ‡ (in.)	Air Pressure (psi)	Net Weight † (lb.)
(lb.)	(Ton)		Pull Cord	Pendant Throttle *		Lifting	Lowering			
500	1/4	Link	CAH-0565-LC	CAH-0565-LP	1	65	95	15 1/4	90	36
1000	1/2	Link	CAH-1045-LC	CAH-1045-LP	1	45	120	15 1/4	90	36
2000	1	Link	CAH-2023-LC	CAH-2023-LP	2	23	60	18	90	49
500	1/4	Roller	CAH-0565-RC	CAH-0565-RP	1	65	95	15 1/4	90	37
1000	1/2	Roller	CAH-1045-RC	CAH-1045-RP	1	45	120	15 1/4	90	37
2000	1	Roller	CAH-2023-RC	CAH-2023-RP	2	23	60	18	90	51
<b>Spark Resistant Models</b>										
750	3/8	Link	CAH-0760-CS	CAH-0760-PS	1	60	100	15 1/4	90	36
1500	3/4	Link	CAH-1529-CS	CAH-1529-PS	2	29	52	18	90	49

\* Equipped w/ 6-foot pendant control.

† Add 10 lbs. to Pull Cord Model for Net Weight on Pendant Model.

‡ Headroom dimension given for swivel top hook suspension only

\*\* Speeds based on 90 PSI line pressure and with full rated load.

**NOTE:** Hoist speeds are adjustable and can be reduced. Shipped from factory w/ hoisting speed set to maximum rated speed; lowering speed set at rated speed.




AIR POWERED HOISTS

MODEL  
**CAH**  
Large Frame

**VARIABLE  
SPEED CONTROL-  
SMOOTH  
OPERATION**

## CAH Large Frame Model Air Hoists

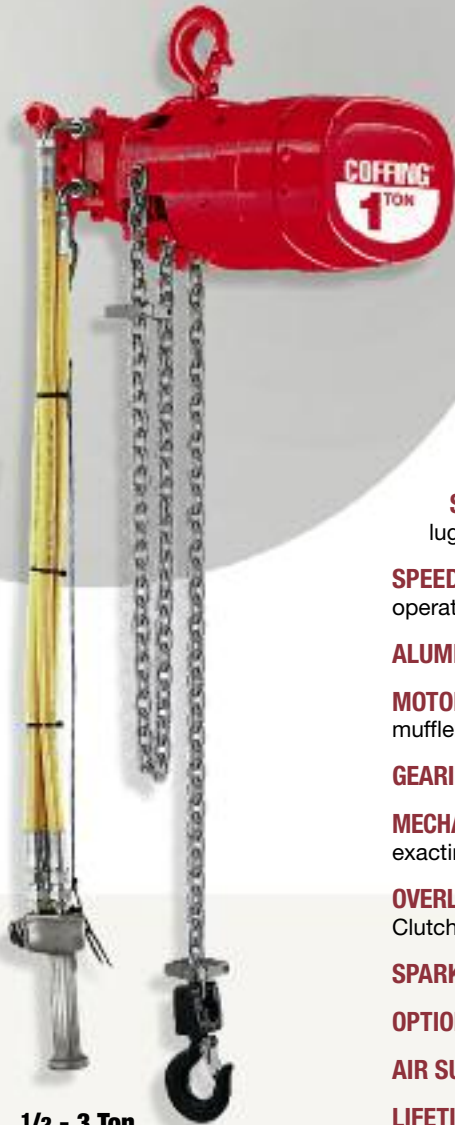

**1/2 - 3 Ton**

**Made in USA**

**COFFING CAH Large Frame Models** - Large frame air chain hoists featuring continuous duty service for precise, infinitely variable speed and accurate load spotting.

**CAPACITIES & LIFT** - Rated loads of 1, 2 & 3 ton. 10-foot standard lift, longer lifts available.

**CONTROLS** - Pendant throttle is full-flow design. 6-foot pendant hose length for 10-foot lift (4-foot less than lift—standard).

**THROTTLE VALVE** - Precision throttle valves meter air for smooth starts.

**SUSPENSION** - Swivel top and bottom hooks with safety latches standard. Rigid top hook, lug, plain, geared, and air motor trolleys available.

**SPEEDS** - Precise and infinitely variable speed control for accurate load spotting. 90 PSI air operating pressure.

**ALUMINUM HOUSING** - Lightweight, compact, and strong.

**MOTOR** - 8-vane rotary air motor produces high, uniform torque and quick response. Internal muffler for quiet operation.

**GEARING** - Combination of precision cut, heat-treated helical and spur gears for efficient operation.

**MECHANICAL LOAD BRAKE** - Positive acting Weston-type load brake holds the load and provides exacting load spotting and control.

**OVERLOAD CLUTCH** - Protects hoist, operator, and supporting structures from damaging overloads. Clutch acts as upper and lower limits.

**SPARK RESISTANT MODELS** - Rated loads 1/2, 1 & 2 ton.

**OPTIONS** - Corrosion resistant models and chain containers also available.

**AIR SUPPLY** - Inlet size: 3/4" NPTF; Supply hose: 3/4" I.D. min.

**LIFETIME WARRANTY**

**Trolleys for CAH Models:**

For Hook Mounted Hoists - see page 44

For Lug Mounted Hoists - see pages 34, 35

### ● SPECIFICATIONS ●

**CAH Large Frame Air Chain Hoist**

\* Speeds based on 90 PSI line pressure and with full rated load.

† Headroom dimension given for swivel top hook suspension only.

Air Consumption: 70 SCFM (full load - full speed) slow speed model; 80 SCFM (full load - full speed) fast speed model.

Standard lift 10 ft.  
Longer lifts are available

**NOTE:** For complete dimensional data, refer to Coffing Dimensional Databook.

Capacity		Model Number	Number of Chains	Lift Speeds *		Headroom † (in.)	Air Pressure (psi)	Net Weight (lb.)
(lb.)	(Ton)			Lifting	Lowering			
2000	1	CAH-2013	1	13	18	16 9/16	90	93
2000	1	CAH-2030	1	30	42	16 9/16	90	95
4000	2	CAH-4006	2	6	9	22 1/4	90	110
4000	2	CAH-4015	2	15	21	22 1/4	90	112
6000	3	CAH-6004	3	4	6	24	90	144
6000	3	CAH-6010	3	10	14	24	90	146
<b>Spark Resistant Models</b>								
1000	1/2	CAH-0516-S	1	16	22	16 3/4	90	95
2000	1	CAH-1008-S	2	8	11	22 7/8	90	112
4000	2	CAH-2005-S	3	5	7	25 7/8	90	146

# CAH LARGE FRAME CUTAWAY VIEW

## HIGH PERFORMANCE LIFTING

### Multi-Vane Rotary Air Motor

*8-vane rotary design provides:*

- High torque
- Smooth operation
- Positive starting
- Excellent load control

### Aluminum Frame & Cover

*Lightweight aluminum housing offers:*

- Rugged holding shafts and bearings in close alignment.

### Infinitely Variable Speed Control


*Full-flow pendant design offers operator exacting throttle control:*

- Precise throttle valves meter air flow for smooth operation

### Combination Gearing

*Model CAH hoists combine efficient gearing that features:*

- Precision cut, heat-treated helical and spur gear combination
- Quiet, efficient operation

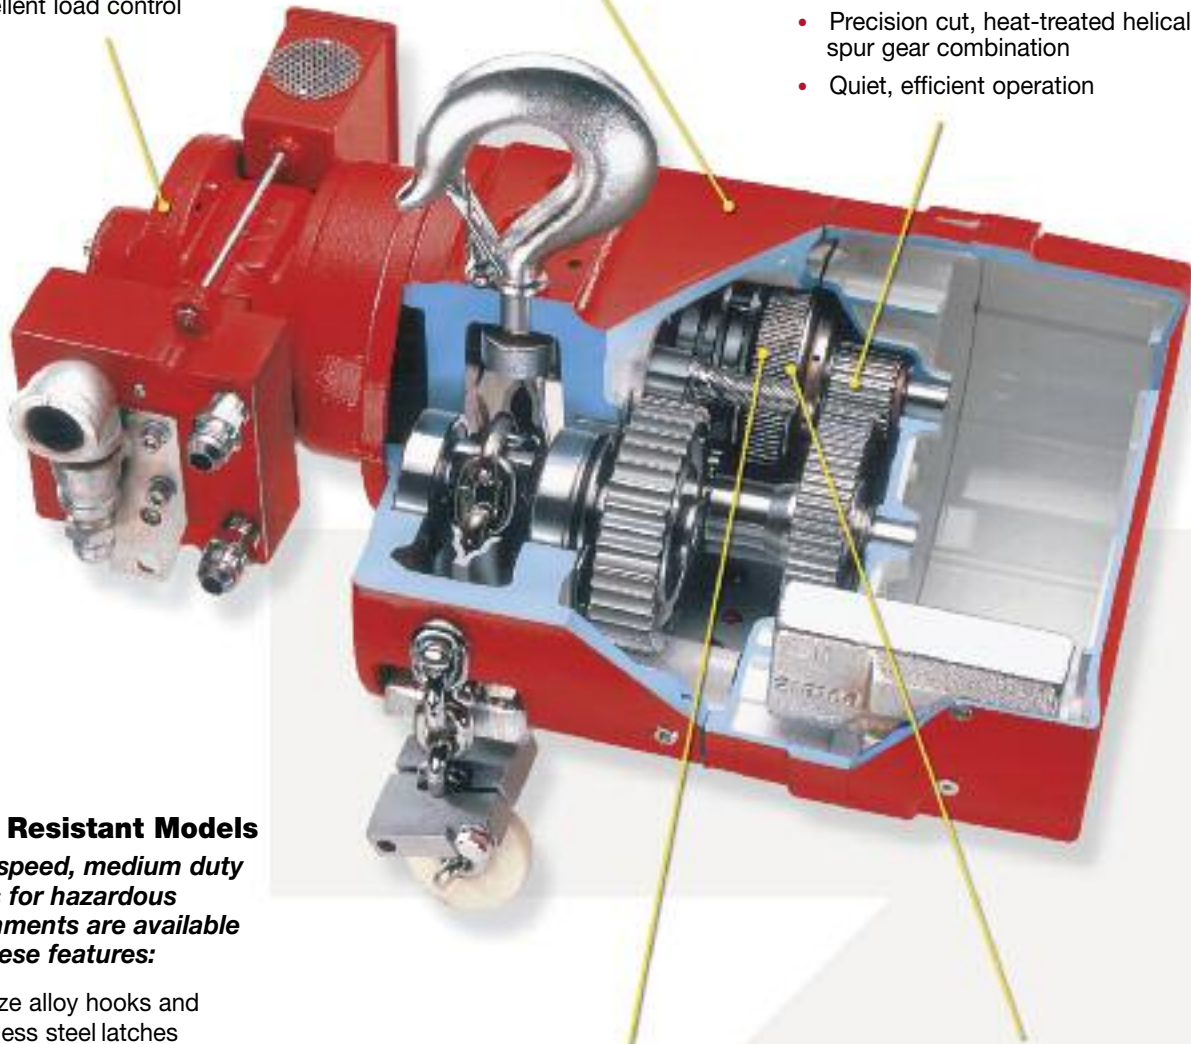

### Spark Resistant Models

*Lower speed, medium duty models for hazardous environments are available with these features:*

- Bronze alloy hooks and stainless steel latches
- Chrome nickel non-magnetic stainless steel alloy load chain
- Bronze limit stop with aluminum limit actuators and modified sprocket and guide

### Mechanical Load Brake

*Positive acting Weston-type load brake*

- Holds the load effectively
- Provides exacting load spotting and control

### Overload Protection

*Overload device helps ensure smooth, safe operation:*

- Protects against excessive overloads
- Clutch acts as upper and lower limits of chain travel